

Circulation type filter cleaner for tank cleaning

Air type Compressor/Higher than 5HP	Viscosity Less than 500cP
---	-------------------------------------

**Without stopping the production,
you can clean cutting liquid in tank.**

With simple
dewatering
function

**Sucking•Discharging
by circulation**

Circulation/filtering are possible, even during operation time.



Foreign materials only are collectable.



Filter for J-FS-i

For Chips
SUS Filter Type

Standard 40 Mesh

- #100, #150 and #200 are also available at your option.
- J-FS type can be changed to J-FF type, once filter set is purchased/replaced.




Filter for J-FF-i

For Polishing
Unwoven Filter Type

- Aluminum, Stainless,
For BC(CAC) and plastics etc.,
applicable for cutting, (sludge) polishing.
- Nylon filter is also available at your request.



Collected material is visible.

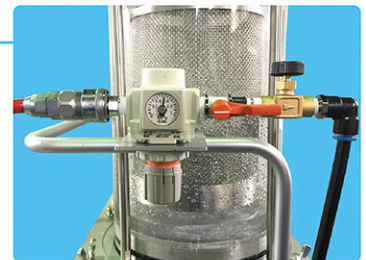

Carrier



You can easily move
even on narrow path

J-FS-i

Discharging Port

- No electric leak assures your safety.
- Save your cleaning time.
- Simple design helps your job even at limited place.

YouTube
Visit our
moving photo
for further
information.



Without stopping the production, You can easily take care of circulation cleaning.

Circulation type filter cleaner for tank cleaning.



*japanese only

Efficient operation within limited time.

You can easily clean cutting liquid, which helps to remove bacteria. Chip friction can be improved. Longer life of coolant liquid is expected, due to better quality control of product.


30% better efficiency is expected.

While operating machines, you can clean cutting liquid with shorter time. Operation efficiency is assured.



Filtering

- 1 Fill the compressed air with 0.4-0.6Mpa.
- 2 Open valve (ON/OFF)
- 3 Start collection
- 4 Circulation of filtered liquid



Easy filter maintenance!

Remove upper cover, and take filter out. Then, discard the wastes only. Stainless filter is washable, which helps to reuse. No need to purchase new filter, every time when the product is operated. Visit our moving photo for further information.



Circulation type filter cleaner for Chips / for Polishing

J-FS-i / J-FF-i After cutting liquid is filtered by circulation.

Model	J-FS-i	J-FF-i
Applicable liquid	Cutting liquid (Coolant liquid)	
Air Consumption	230ℓ/min	
Sucking Height	4m	
Max. sucking volume	60ℓ/min	
Max. sucking capacity	60ℓ/min	
Accessories	Filter	SUS for chips / Unwoven filter for polishing
	Nozzle	Straight Pipe
Material / Weight	Hose (Long・Inner dia.)	Sucking Side : PVC(1.5m×φ32) / Discharging Side : Reinforce PVC(3m×φ25)
	Body/Nozzle	AL・Acryl
	Packing	ABS・NBR
Weight	36.0kg	

2 kinds of filter are available

SUS Filter Type
J-FS-i



*You can use as FF type, with unwoven filter kit purchased

Unwoven Filter Type
J-FF-i



We can produce your special filters.

SUS Filter Type

40 Mesh is standard, but #100, #150 and #200 are also available at your option.



Unwoven Filter Type

Standard is equivalent to #400, but nylon filter for #100 and #200 are also available at your option.

J-FS-i

AQUASYSTEM CO.,LTD.

JAPAN

Add: 1-3-1 Kyo-machi, Hikone City, Shiga, 522-0081, Japan

TEL: +81-749-23-9139 FAX: +81-749-28-1474

E-mail: trade@aqsys.co.jp

WEB: <http://en.aqsys.co.jp>

Alibaba Shop: <https://aquasystem.trustpass.alibaba.com/>



Overseas Companies Information

安跨(常州)泵业有限公司 AQUASYSTEM(CHANGZHOU)CO.,LTD

江苏省常州市新北区创业东路 16 号 粤海工业园常州滨江园 11C
TEL:(86)0519-69551022 FAX:(86)0519-69885565 <http://www.aqsys-cn.com/>

AQUASYSTEM (THAILAND) CO., LTD

81 SOI KANCHANAPISEK 001 KANCHANAPISEK Rd., BANGBON TAI
BANGBON BANGKOK, THAILAND

TEL: (66) 02-8988016 FAX:(66)02-8988018 <http://www.aqsys-thai.com/>

AQUASYSTEM TRADING (VIETNAM) CO., LTD

No. B1013, The Oasis III, D16 Street, Viet-Sing Town, Thuan An District,
Binh Duong Province, Vietnam

TEL:(84)02746-559955 Email: aqtv@aqsys.vn <http://www.aqsys.vn/>